


## Graphite Rigid Board (Vacuum Formed)

- Graphite rigid board (FGM-201) is a low density bonded carbon fiber material that is designed to operate in a vacuum or inert atmosphere up to 5000°F (2750°C).
- Available in custom sizes & thicknesses up to 10" thick & 50" wide & 60" long.
- Rigid board can be easily shaped by machining, sawing and drilling and can even be machined into cylindrical forms to meet specific complex configurations.
- Foil, carbon cloth and coatings that can be applied to the board to prevent infiltration & oxidation while maximizing the insulation performance and longevity.
- Density is measured and recorded on 100% of the material.


### **Distinguishing Characteristics**

- Low thermal conductivity & expansion
- Good thermal insulating qualities
- Low out-gassing in temperatures > 1400°C
- Low vapor pressure at high temperatures
- Low ash and sulfur content
- Low moisture absorption
- Light weight and easily installed
- Low heat retention
- Resistant to metal vapor impregnation
- Excellent chemical resistance
- Rapid heating and cooling due to low mass
- Unsurpassed thermal shock resistance

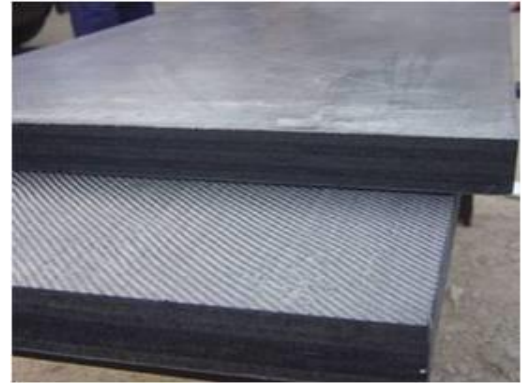

### **Graphite Rigid Insulation Board Properties**

- 100% Rayon Precursor
  - Fired to 2000 Deg. C
  - Bulk Density: 17 g/cc
  - Flexural Strength: 145 psi
  - Compressive Strength: 29 psi
- Thermal Conductivity
- BTU-in/hr-ft<sup>2</sup>-° F
  - 1,000 deg C = 1.7
  - 1,500 deg C = 2.3
  - 2,000 deg C = 3.1
- Ash Content: 300~800 ppm

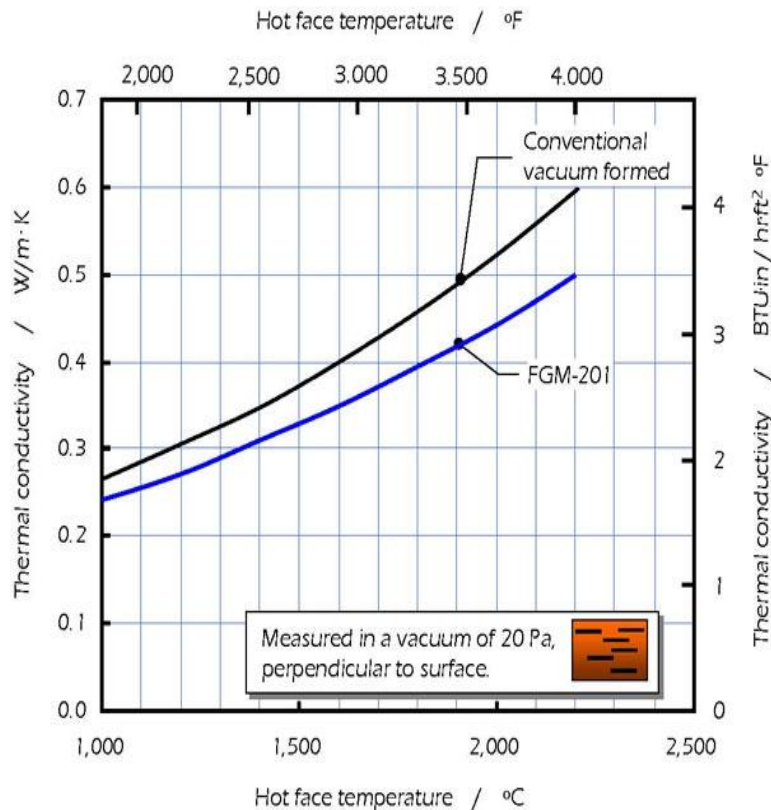

**Please contact: Jerry Weinstein (518) 701-6722**  
**Email; [jerryw@ceramaterials.com](mailto:jerryw@ceramaterials.com)**  
**Web Site; [www.ceramaterials.com](http://www.ceramaterials.com)**